

# High performance systems for EMC and RF protection environments



## REMC3 - 3m SAC

A 3 metre test range Anechoic Chamber for fully compliant Emission and Immunity testing. Ferrite and hybrid pyramidal absorbers are combined in a unique design, within a SmartShield high performance chamber

**Radiated Emission: 30MHz - 18GHz**

**Radiates Immunity: 30MHz - 6GHz**

### Key features:

- Emission performance of +/-4dB or better (typically 3.2dB) **ANSI C63.4, EN50147/2**
- Fully compliant for Immunity in accordance with **EN61000.4.3**
- Fully compliant in accordance to sVSWR **CISPR 16-1-4**
- REMC3 also meets several **ETSI** test standards (**UKAS accredited**)
- Ferrite and Hybrid Lining for **30MHz-40GHz** measurements
- Optimised computer modelling to enable partial Hybrid low cost version
- **Total turnkey solutions**, including Turntables and Test systems, available
- Flexible modular design enables easy site changes or upgrading
- Independently certified **100dB @ 18GHz** shielding performance (ISO17025)



### General Description:

The Rainford **REMC3** chamber's overall size results from the use of a unique hybrid absorber design, which require less volumetric space than traditional absorbers.

Using our SmartShield high performance, modular construction shielding system, we can offer a versatile demountable system.

A combined Managerial experience in EMC of over 100 years, to provide complete customer satisfaction.

The Rainford **REMC3** is just one of a range of pre-defined designs that includes the Rainford **RMCC** (Mini Compact Chamber), **RCC** (Compact Chamber), **REMC5 & REMC10**.

Our vast experience and design tools allow us to adapt our existing designs to suit specific customers requirements.


High quality and long life, are guaranteed with our **ISO9001** certified production facility.

With the future in mind, Rainford EMC is certified according to the Environmental standard **ISO14001**

Rainford **EMC** Systems Ltd,  
North Florida Road, Haydock,  
St Helens, WA11 9TN,  
United Kingdom  
Tel: +44 (0) 1942 296190  
Fax: +44 (0) 1942 275202  
email: [sales@rainfordemc.com](mailto:sales@rainfordemc.com)



# High performance systems for EMC and RF protection environments

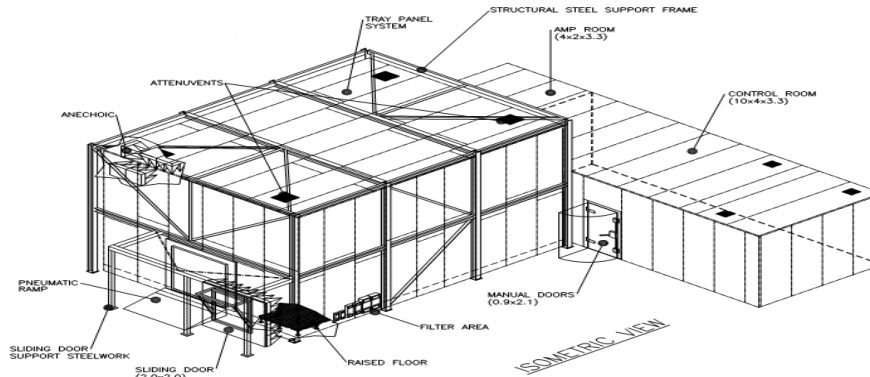

## Standard Equipment

1 x 0.9m x 2.1m personnel door  
1 x Mains filter 240v, 32A  
4 x Attenuents (300mm x 300mm)  
Electrical Installation includes:  
1 x Consumer unit  
6 x Single phase sockets  
4 x Lights

2 x Penetration panels  
Feedthroughs interfaces include:  
4 x N-Type connectors  
4 x BNC Type connectors  
2 x Fibre Optic  
1 x Penetration tube 5cm with cap  
Raised floor  
Absorber lining

## Options

Large Access door  
Turntable, Mast ,Controllers  
Dynamometers  
3-Phase mains filter  
Control/data line filters  
Test & Measurement Systems

Air conditioning  
Exhaust extraction  
Video system  
Fire detection/suppression  
Chamber calibration/Verification  
Control room  
Amplifier room

## Maintenance

REMC 1 to 5 year maintenance pack available

## Technical Data

26 MHz - 40 GHz Performance Range

Full Compliance Testing for Radiated Emissions:

- ANSI C63.4
- FCC Parts 15 & 18
- EN 50147-2
- EN50011/CISPR 11
- EN550016/CISPR 16
- EN550022/CISPR 22
- VCCI V-3/2004.04
- 2004/104/EC -SAE J551 /CISPR25

Full Compliance Testing for Radiated Immunity:

- IEC 61000-4-3/EN61000-4-3
- 2004/104/ISO11452/EC -SAE J551, SAE J-1113

Rainford EMC Systems Ltd,  
North Florida Road, Haydock,  
St Helens, WA11 9TN,  
United Kingdom

Tel: +44 (0) 1942 296190

Fax: +44 (0) 1942 275202

email: [sales@rainfordemc.com](mailto:sales@rainfordemc.com)

